


Linux Introduction

U

1. july 2003 – /etc 2003, Athens

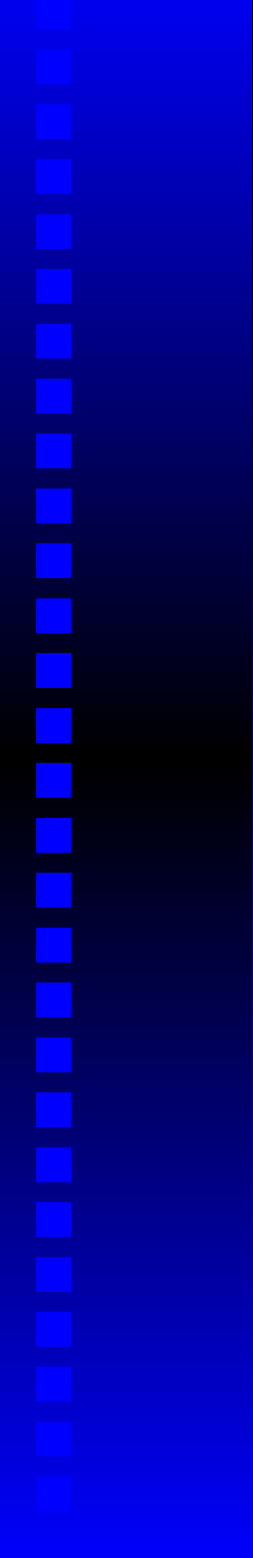

Introduce yourself
and
IMAGINE what YOU would like to DO
with your computer ?

Our Main Principle Today is

Our Main Principle Today is

You DON'T need
to CONCENTRATE ON clicking buttons
on an interface!

Our Main Principle Today is

Close your eyes, think about ways of interaction
with a computer!

What you need to know

about the Operating System `Linux` and its
behaviour:

What you need to know

about the Operating System `Linux` and its behaviour:

- it only talks to persons it knows – that is `root` and other `users`.

What you need to know

about the Operating System `Linux` and its behaviour:

- it only talks to persons it knows – that is `root` and other `users`.
- it is a little bit obstinate – it insists on a login procedure with `username` and `password`.

What you need to know

about the Operating System `Linux` and its behaviour:

- it only talks to persons it knows – that is `root` and other `users`.
- it is a little bit obstinate – it insists on a login procedure with username and password.
- it mostly "speaks" English (as default).

What you need to know

about the Operating System `Linux` and its behaviour:

- it only talks to persons it knows – that is `root` and other `users`.
- it is a little bit obstinate – it insists on a login procedure with username and password.
- it mostly "speaks" English (as default).

Practice: Change between console and GUI with `ALT+F7` and `CTR+ALT+F1`.

1. conversation – *small talk*

1. conversation – *small talk*

- login with username and password

1. conversation – *small talk*

- login with username and password
- type `whoami`

1. conversation – *small talk*

- login with username and password
- type `whoami`
- ask for the computer's name with `hostname`

1. conversation – *small talk*

- login with username and password
- type `whoami`
- ask for the computer's name with `hostname`
- ask for time and date with `date`

1. conversation – *small talk*

- login with username and password
- type `whoami`
- ask for the computer's name with `hostname`
- ask for time and date with `date`
- ask for Operating system, hostname and kernel version with `uname -a`

1. conversation – *small talk*

- login with username and password
- type `whoami`
- ask for the computer's name with `hostname`
- ask for time and date with `date`
- ask for Operating system, hostname and kernel version with `uname -a`
- change your password with `passwd`

1. conversation – *small talk*

- login with username and password
- type `whoami`
- ask for the computer's name with `hostname`
- ask for time and date with `date`
- ask for Operating system, hostname and kernel version with `uname -a`
- change your password with `passwd`
- logout typing `exit`

2. conversation – *at work*

2. conversation – *at work*

- "What are you doing?" – display CPU processes with `top`

2. conversation – *at work*

- "What are you doing?" – display CPU processes with `top`
- report process status – `ps -u | grep mozilla`

2. conversation – *at work*

- "What are you doing?" – display CPU processes with `top`
- report process status – `ps -u | grep mozilla`
- "Could you tell me how to work together?" – manual pages `man ps`, `man cp`, `man ls`
...

2. conversation – *at work*

- "What are you doing?" – display CPU processes with `top`
- report process status – `ps -u | grep mozilla`
- "Could you tell me how to work together?" – manual pages `man ps`, `man cp`, `man ls`
...

⇒ Linux is sleeping like a watchdog nearly all the time!

2. conversation – *at work*

- "What are you doing?" – display CPU processes with `top`
- report process status – `ps -u | grep mozilla`
- "Could you tell me how to work together?" – manual pages `man ps`, `man cp`, `man ls`
...

⇒ Linux is sleeping like a watchdog nearly all the time!

⇒ You have a lot of computing capacity left which could be used!

3. conversation – *wake up!*

3. conversation – *wake up!*

- Switch on a windowmanager's interface.

3. conversation – *wake up!*

- Switch on a windowmanager's interface.
- Open one shell; type `top`.

3. conversation – *wake up!*

- Switch on a windowmanager's interface.
- Open one shell; type `top`.
- Open another shell; type `mozilla`

3. conversation – *wake up!*

- Switch on a windowmanager's interface.
- Open one shell; type `top`.
- Open another shell; type `mozilla`

What's the operating system doing?

4. conversation – devices

4. conversation – devices

- type `dmesg` – that's a collection of messages to whoever is interested in the kernel status

4. conversation – devices

- type `dmesg` – that's a collection of messages to whoever is interested in the kernel status
- type `cat /proc/interrupts` (see <http://genderchangers.org>)

4. conversation – devices

- type `dmesg` – that's a collection of messages to whoever is interested in the kernel status
- type `cat /proc/interrupts` (see <http://genderchangers.org>)
- type `cat /proc/cpuinfo` and learn to know your CPU

4. conversation – devices

- type `dmesg` – that's a collection of messages to whoever is interested in the kernel status
- type `cat /proc/interrupts` (see <http://genderchangers.org>)
- type `cat /proc/cpuinfo` and learn to know your CPU
- type `cat /proc/meminfo` to find out about memory

4. conversation – devices

- type `dmesg` – that's a collection of messages to whoever is interested in the kernel status
- type `cat /proc/interrupts` (see <http://genderchangers.org>)
- type `cat /proc/cpuinfo` and learn to know your CPU
- type `cat /proc/meminfo` to find out about memory
- type `cat /proc/modules` to find out about active and inactive modules

4. conversation – devices

- type `dmesg` – that's a collection of messages to whoever is interested in the kernel status
- type `cat /proc/interrupts` (see <http://genderchangers.org>)
- type `cat /proc/cpuinfo` and learn to know your CPU
- type `cat /proc/meminfo` to find out about memory
- type `cat /proc/modules` to find out about active and inactive modules
- type `ls -al /dev/hda1` to get info about the first partition of harddrive a

5. conversation – *on the phone*

5. conversation – *on the phone*

- Login into a remote machine with `ssh username@remote-machine` and repeat the previous conversations.

5. conversation – *on the phone*

- Login into a remote machine with `ssh username@remote-machine` and repeat the previous conversations.
- Look if another machine is alive with `ping 213.206.74.73`; compare with `ping genderchangers.org`.

5. conversation – *on the phone*

- Login into a remote machine with `ssh username@remote-machine` and repeat the previous conversations.
- Look if another machine is alive with `ping 213.206.74.73`; compare with `ping genderchangers.org`.
- Open another shell; login as root with `ssh root@local-machine`; type `tcpdump` and wait ...

5. conversation – *on the phone*

- Login into a remote machine with `ssh username@remote-machine` and repeat the previous conversations.
- Look if another machine is alive with `ping 213.206.74.73`; compare with `ping genderchangers.org`.
- Open another shell; login as root with `ssh root@local-machine`; type `tcpdump` and wait ...
- `traceroute genderchangers.org` shows the way the data-packets are travelling.

5. conversation – *on the phone*

- Login into a remote machine with `ssh username@remote-machine` and repeat the previous conversations.
- Look if another machine is alive with `ping 213.206.74.73`; compare with `ping genderchangers.org`.
- Open another shell; login as root with `ssh root@local-machine`; type `tcpdump` and wait ...
- `traceroute genderchangers.org` shows the way the data-packets are travelling.
- Type `ifconfig -a` to look at the network configuration and search for your IP-address.

6. conversation – people talk!!

6. conversation – people talk!!

- Open a shell; type `BitchX`
`irc.indymedia.org` yournickname and
wait until BitchX has finished ranting;

6. conversation – people talk!!

- Open a shell; type `BitchX`
`irc.indymedia.org` yournickname and
wait until BitchX has finished ranting;
- type `/join #etc` to join the channel etc; now
rant as much as you can!!!

6. conversation – people talk!!

- Open a shell; type `BitchX`
`irc.indymedia.org` `yournickname` and
wait until `BitchX` has finished ranting;
- type `/join #etc` to join the channel etc; now
rant as much as you can!!!
- instead of using unencrypted IRCing (e.g.`BitchX`)
you can use `Silc` which is an encrypted
IRC-program.